

OM7 DYNAMIC VOCAL MICROPHONE

OVERVIEW:

Designed, assembled and tested by Audix in the USA, the OM7 is a dynamic vocal microphone used for professional sound companies, front of house and mixing engineers, and high profile fixed installations. The OM7 is known for its ability to provide unprecedented gain before feedback on concert level stages without sacrificing sound quality. In addition, the OM7 is very resistant to feedback on extremely loud stages, and for performers who tend to "cup" the microphone with both hands.

In order to achieve these extraordinary performance benefits, the OM7 is designed with an unconventionally low output level (8-10 dB lower than typical dynamic microphones). This low gain stage acts as a natural "pad" at the capsule in order to maintain high fidelity at the source. For this reason, the OM7 is best suited for use with high quality mixing consoles with plenty of head room to compensate for the low gain.

The OM7 is characterized with a super-tight hypercardioid polar pattern which effectively isolates the vocals from the rest of the instruments on stage. With a wide frequency range of 48 Hz - 19 kHz, the OM7 employs a VLM™ (Very Low Mass) diaphragm for a very clean and punchy sound with exceptional transient response.

Well balanced, comfortable to hold and durable, the OM7 is manufactured with very high standards and tight tolerances. Roadworthy construction includes a precision die cast zinc alloy body, black e-coat finish, laser etched model and serial number, steel mesh grill, Switchcraft® XLR connector, and heavy duty nylon clip.

SUPPLIED ACCESSORIES:

Heavy duty nylon mic clip (MC1)
Carrying pouch (P1)

OPTIONAL ACCESSORIES:

WS357 - External foam windscreens
CBL20 - 20' XLR-XLR mic cable




FEATURES:


- Studio quality sound
- Low gain stage acts as natural pad
- Unprecedented gain before feedback
- Handles high SPL without distortion
- Low handling noise
- Provides exceptional vocal isolation on stage
- Dent resistant steel spring grill
- 5 year warranty

APPLICATIONS:

- Lead or backing vocals
- Live recording
- Broadcast
- Home studio - vocal and instrument
- Sax, brass, guitar, dobro, flute, percussion, drums



MC1



WS357



CBL20

OM7

SPECIFICATIONS:

Transducer Type	Dynamic
Frequency Response	48 Hz - 19 kHz
Polar Pattern	Hypercardioid
Output Impedance	150 ohms
Sensitivity	0.8 mV / Pa @ 1k
Capsule Technology	VLM Type C
Off Axis Rejection	> 30 dB
Maximum SPL	≥144 dB
Power Requirements	None
Connector	Switchcraft® male XLR connector
Polarity	Positive pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector
Housing / Finish	Zinc Alloy / Black E-coat
Weight	307 g / 10.8 ounces
Length	176 mm / 6.9 inches

ARCHITECTS AND ENGINEERS SPECIFICATIONS:

The microphone shall be of the dynamic type and the polar pattern of the microphone shall be hypercardioid. The nominal output impedance shall be equal to 150 ohms at 1 kHz. The microphone shall have a sensitivity of 0.8 mV / Pa at 1 kHz and a sound pressure level ≥144 dB. The microphone body shall be of die cast zinc alloy and the grill cap shall be steel wire mesh. The overall dimensions shall be 23 mm in diameter at the base, 53 mm in diameter at the widest point on the grill and 176 mm in length. The microphone shall be the Audix OM7.



OPERATION:

The OM7 is a low impedance microphone and should be plugged into the "mic level" input of your console, mixer, or recording device. Please note that your microphone does not require phantom power and will not be effected in any way by phantom power should it be running simultaneously while the microphone is in operation. Avoid plugging or unplugging the microphone from the PA system unless the channel is muted or the volume of the system turned down. Failure to do so may result in a loud "popping" noise which could seriously damage the speakers in the PA system.

USER TIPS:

The OM7 is designed with an unconventionally low output level; this means that the gain will have to be compensated on the mixing console or mic preamp. The OM7 has the tightest pick-up pattern of any microphone on the market in order to help eliminate sound from other instruments on stage from "bleeding" into the microphone. For best results, it is important to sing directly into the mic as close as possible (within 1-inch)! When using floor monitors, position the microphone so that it is parallel to the floor. When using multiple microphones on a live performance stage, allow a distance of 2-3 feet between mics to avoid phase issues.

*Further miking techniques may be found on our website at www.audixusa.com

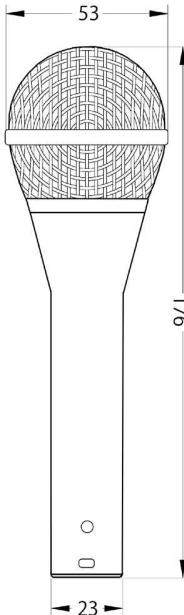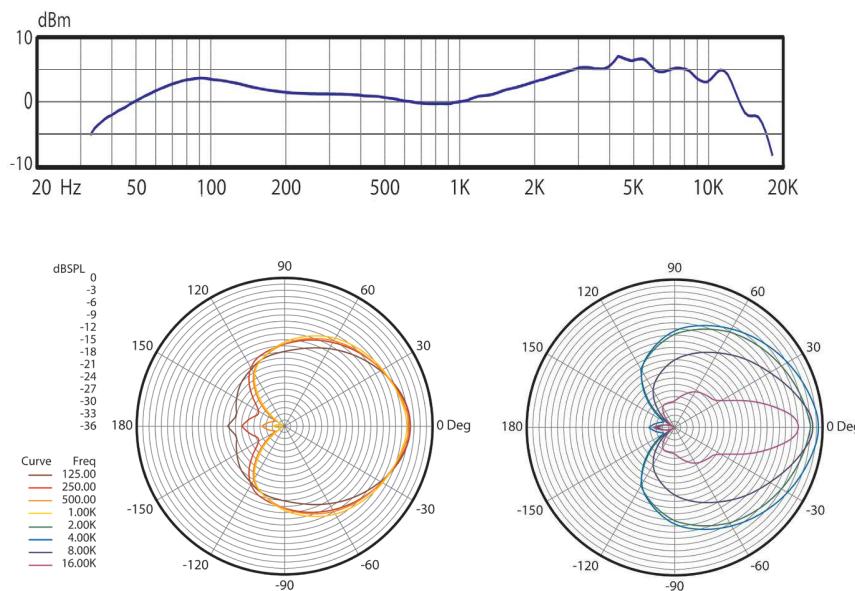FREQUENCY / POLARS:**DIMENSIONS (mm):**

***All specifications subject to change without notice.

SERVICE AND WARRANTY:

This microphone is under warranty for a period of 5 years from any and all manufacturing defects. Should your microphone fail in any way, please contact the Audix Service department at 503-682-6933. A Return Authorization number is required before returning any products.

CARE AND MAINTENANCE:

The OM7 is manufactured to exacting specs with roadworthy construction. However, the capsule is highly sensitive and should be handled with care. Avoid extreme temperatures and be sure to store your microphone in the pouch provided when not in use. Moisture of any kind can adversely affect the sound and performance of your microphone.

To register your microphone, please visit
www.audixusa.com



www.audixusa.com Call: 503-682-6933 Fax: 503-682-7114
Audix Corporation 9400 SW Barber Street, Wilsonville, OR 97070